



"X"-HOLES "Y" DIA
EQUI-SPACED
ON "P" PCD

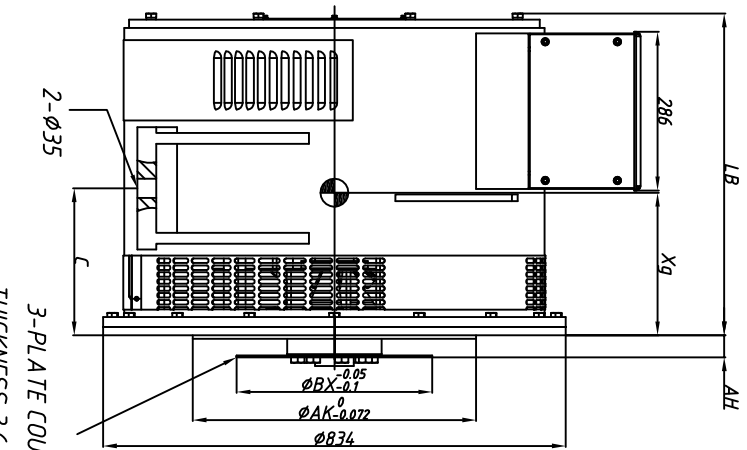

"N"-HOLES "BF" DIA
EQUI-SPACED ON
"AJ" PCD

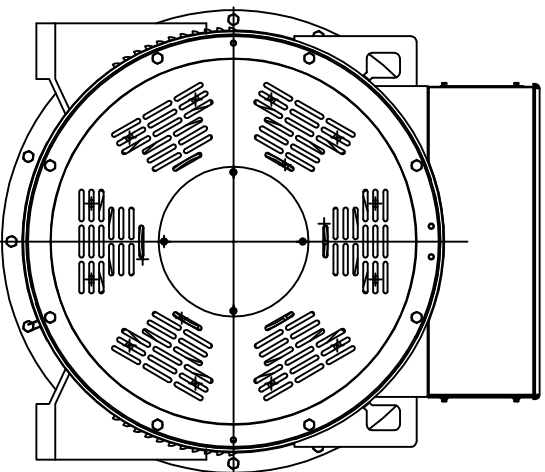

3-PLATE COUPLING TOTAL
THICKNESS 3.6 HUB SECURING
BOLTS TO BE TIGHTENED TO A
TORQUE OF 24.9Kgf.m 244N.m

| Dimension (mm) | LB | Xg | C |
|----------------|-----|-----|-----|
| SMC355B | 530 | 205 | 265 |
| SMC355C | 530 | 215 | 265 |
| SMC355D | 530 | 225 | 265 |
| SMC355E | 555 | 235 | 265 |
| SMC355F | 555 | 240 | 265 |
| SMC355G | 580 | 255 | 265 |
| SMC355H | 580 | 260 | 265 |
| SMC355J | 660 | 295 | 290 |
| SMC355K | 660 | 305 | 290 |
| SMC355L | 685 | 310 | 290 |
| SMC355M | 685 | 315 | 290 |

| Flange(mm) | | | |
|------------|--------|--------|----|
| SAE# | AK | AJ | BF |
| SAE 1 | 511.18 | 530.22 | 14 |
| SAE 2 | 447.68 | 466.72 | 11 |
| SAE 3 | 409.58 | 428.62 | 11 |

| Disc(mm) | | | | | |
|----------|--------|--------|----|----|------|
| SAE# | BX | P | X | Y | AH |
| SAE 1 | 511.18 | 530.22 | 14 | 12 | 39.6 |
| SAE 2 | 447.68 | 466.72 | 11 | 12 | 25.4 |

| | | | |
|------------|------|---------|---------------|
| SMC355 | | #1 | |
| SAE: | | A2 | |
| Design | DATE | 2021.01 | |
| MOD | DRW | DATE | |
| APP | DATE | | |
| GB/11804-m | | mm | |
| | | | SINOCO |